


ADJUSTABLE WALL LOUVERS

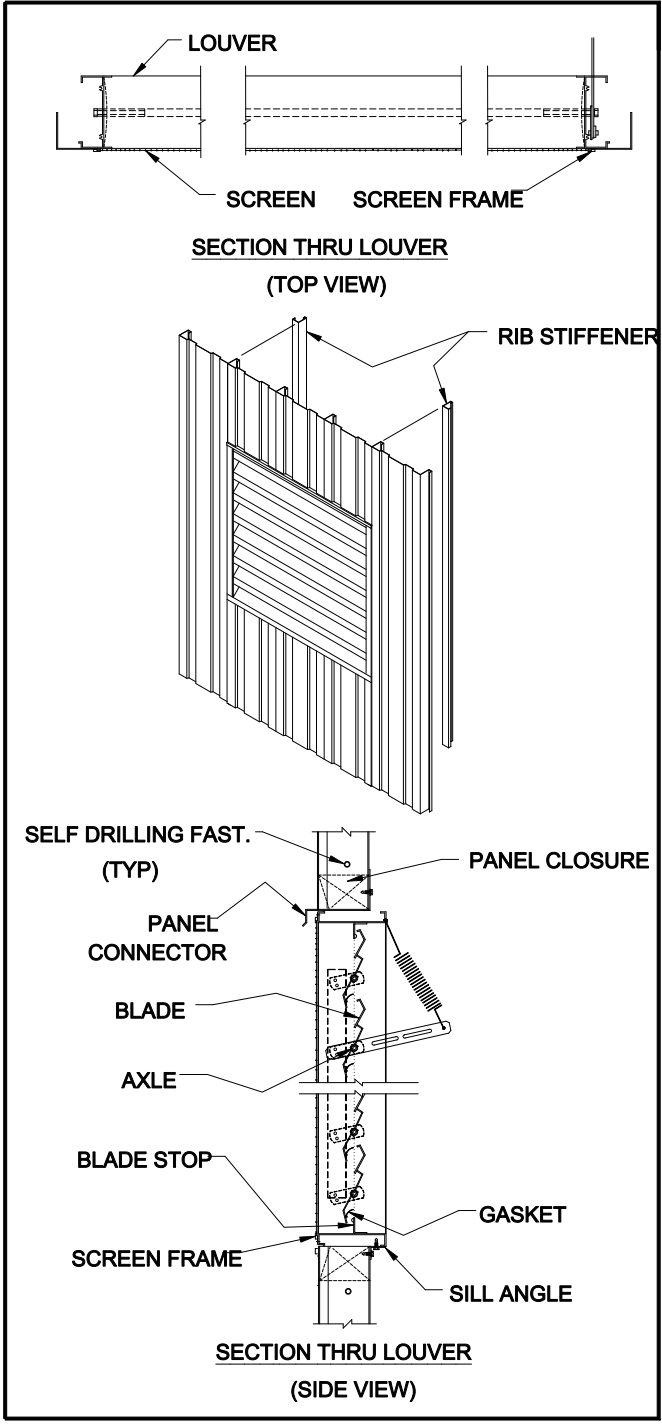

PRODUCT DESCRIPTION

ADJUSTABLE LOUVERS

Adjustable louvers shall be of self framing design. The louver frame shall be of nominal 14 gauge formed aluminum and the louver blades shall be nominal 12 gauge extruded aluminum. Finish shall be natural mill finish and shall not require field painting.

Blades shall be pivoted on 1/2" diameter aluminum pivot pins through nylon flanged bearings and operated by means of a pull bar operating handle. All louvers shall be complete with an exterior mounted 18-14 aluminum mesh insect screen.

NOTE: Designer must specify louver sill height. Minimum sill or head height is 6".

Available Sizes:

- 16" wide x 24" high (181 sq. in. free area)
- 32" wide x 24" high (406 sq. in. free area)
- 48" wide x 42" high (1160 sq. in. free area)

PRODUCT NAME

Adjustable Wall Louvers

MANUFACTURER

Parkline, Inc.
 P.O. Box 65
 Winfield, West Virginia 25213
 Phone: (304) 586-2113 in WV
 (800) 786-4855 outside WV
 (304) 586-3842 FAX
 web: <http://www.parkline.com>
 E-mail: parkline@parkline.com

- Options :
1. - Removable filters
 2. - Motor operator - Available in 12 or 24 volt DC or 110/220 volt AC



13122 AL